



EN 149:2001+A1:2009 protective devices. Filtering half masks to protect against particles. Requirements, testing, marking

Product:	Particle Filtering Half Mask
Report No.:	PTC20071005101C-EN01
Client:	Shenzhen DreamCan Technology Co., Ltd
Client Address:	301/B3,Huaqiang Industrial Park, Qingfeng Ave., Baolong, Longgang District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen DreamCan Technology Co., Ltd
Manufacturer Address:	301/B3,Huaqiang Industrial Park, Qingfeng Ave., Baolong, Longgang District, Shenzhen, Guangdong, China
Contact:	A A A A A A A A A A A A
Model(s):	DP-A-22L-VK
Classification:	FFP2 NR 20 20 20 20 20 20 20 20 20 20 20 20 20
Date of Tests:	2020.07.17~2020.07.28

Signed for and on Behalf of PTC

Prepare by:

Checked by:



This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 2 of 14

Summary of assessment

Clause	Assessment
7.3 Visual inspection	Not tested
7.4 Packaging	PASS
7.5 Material	PASS
7.6 Cleaning and disinfecting	N/A
7.7 Practical performance	PASS
7.8 Finish of parts	PASS
7.9.1 Total inward leakage	PASS
7.9.2 Penetration of filter material	PASS
7.10 Compatibility with skin	PASS
7.11 Flammability	PASS
7.12 Carbon dioxide content of the inhalation air	PASS
7.13 Head harness	PASS
7.14 Field of vision	PASS
7.15 Exhalation valve	PASS
7.16 Breathing resistance	PASS
7.17 Clogging	N/A
7.18 Demountable parts	PASS
9 Marking	Not tested

Remark:

PASS: comply with requirement of standard N/A: not application Not tested: the clause were not required

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.:PTC20071005101C-EN01 Issue Date: J	ui.28, 2020	Page 3 of 14
Test Result:		
Requirement	Test Result	Conclusion
7.3 Visual inspection		
The visual inspection shall also include the marking and the information	Not tested	Not tested
supplied by the manufacturer.		
7.4 Packaging		
Particle filtering half masks shall be offered for sale packaged in such a	In accordance	
way that they are protected against mechanical damage and	with the	Pass
contamination before use.	requirement.	
7.5 Material		
Materials used shall be suitable to withstand handling and wear over the	No mechanical	
period for which the particle filtering half mask is designed to be used.	failure after	
	undergoing the	
Any material from the filter media released by the air flow through the	conditioning	
filter shall not constitute a hazard or nuisance for the wearer.	described in	Sec. 1
After undergoing the conditioning described in 0.2.4 none of the particle	8.3.1,	Pass
After undergoing the conditioning described in 8.3.1 none of the particle	No collapse when	
filtering half masks shall have suffered mechanical failure of the facepiece	conditioned in	
or straps.	accordance with	
When conditioned in accordance with 9.3.1 and 9.3.2 the particle filtering	8.3.1 and 8.3.2.	
When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.		
Thair Thask Shair Hot Collapse.		
7.6 Cleaning and disinfecting		
If the particle filtering half mask is designed to be re-usable, the		
materials used shall withstand the cleaning and disinfecting agents and	Single shift use only	N/A
procedures to be specified by the manufacturer.		
7.7 Practical performance		
The particle filtering half mask shall undergo practical performance test	s No imperfections	Pass
under realistic conditions	X X	××
7.8 Finish of parts	X X X X	
Parts of the device likely to come into contact with the wearer shall have	No sharp edges or	Pass
no sharp edges or burrs.	burrs.	
This report is issued according to the general clauses in www.ptc-testing.com by PTC. Re are defined in the general service clauses. The report is only responsible for the subm		



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 4 of 14

7.9.1 Total inward leakage

For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than 25 % for FFP1, 11 % for FFP2, 5 % for FFP3

and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than 22 % for FFP1, 8 % for FFP2, 2 % for FFP3.

7.9.2 Penetration of filter material

The penetration of the filter of the particle filtering half mask shall meet the requirements of Table 1.

20 20 2	Sodium chloride test	Paraffin oil test 95
XXXX	95 l/min	l/min
FFP1	≤ 20%	≤ 20%
FFP2	≤6%	≤ 6%
FFP3	≤ 1%	≤ 1%

FFP2, Test results are shown in Annex A Table 7.9.1-A&B

Pass

FFP2, Test results are shown in Annex A Table 7.9.2.

Pass

7.10 Compatibility with skin

Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.

7.11 Flammability

When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.

7.12 Carbon dioxide content of the inhalation air

The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)

7.13 Head harness

The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.

The head harness shall be adjustable or self-adjusting and shall be

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission

Precise Testing & Certification (Guangdong) Co., Ltd. (PTC)

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China. Tel: 86-769-38808222 Fax: 86-769-38826111 http:// www.ptc-testing.com

No irritation or any other adverse effect to health.

Test results are

shown in Annex A

Table 7.11.

Pass

Pass

Pass

Test results are shown in Annex A Table 7.12.

Head harness can be donned and removed easily, adjustable or self-adjusting and

Pass



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 5 of 14

sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.

7.14 Field of vision

The field of vision is acceptable if determined so in practical performance tests.

7.15 Exhalation valve

A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.

If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.

Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.

When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.

7.16 Breathing resistance

8° 8° 8° 1	Maximum permitted resistance (mbar)							
Classification	Inha	Exhalation						
N N N	30 l/min	95 l/min	160 l/min					
FFP1	0.6	2.1	3.0					
FFP2	0.7	2.4	3.0					
FFP3	1.0	3.0	3.0					

FFP2. Test results are shown in Annex A Table 7.16.

Single shift use

only.

Pass

7.17 Clogging

7.17.2 Breathing resistance Valved particle filtering half masks: After clogging the inhalation resistances shall not exceed: FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow The exhalation resistance shall not exceed 3 mbar at 160 L/min

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission

Precise Testing & Certification (Guangdong) Co., Ltd. (PTC)Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.Tel: 86-769-38808222Fax: 86-769-38826111http:// www.ptc-testing.com

have sufficiently robust to hold the particle filtering half mask firmly.

Pass the practical performance tests.

Pass

Pass

Comply

v rass

N/A



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 6 of 14

continuous flow

Valveless particle filtering half masks After clogging the inhalation and exhalation resistances shall not exceed: FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow

7.17.3 Penetration of filter material

<i>4. 6. 6</i>	Sodium chloride test	Paraffin oil test 95
20 20 1	95 l/min	l/min o
FFP1	≤ 20%	≤ 20%
FFP2	≤6%	≤6%
FFP3	≤ 1%	≤ 1%

7.18 Demountable parts

All demountable parts (if fitted) shall be readily connected and secured, where possible by hand

9 Marking

9.1 Packaging

The following information shall be clearly and durably marked on the smallest commercially available packaging or legible through it if the packaging is transparent.

9.1.1 The name, trademark or other means of identification of the manufacturer or supplier.

9.1.2 Type-identifying marking.

9.1.3 Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable.

Example: FFP2 R D.

9.1.4 The number and year of publication of this European Standard.9.1.5 At least the year of end of shelf life. The end of shelf life may be informed by a pictogram as shown in Figure 12a, where yyyy/mm indicates the year and month.

 $9.1.6\ {\rm The\ sentence\ 'see\ information\ supplied\ by\ the\ manufacturer',\ at\ }$

least in the official language(s) of the country of destination, or by using

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission

> Precise Testing & Certification (Guangdong) Co., Ltd. (PTC) Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.

Tel: 86-769-38808222 Fax: 86-769-38826111 http:// www.ptc-testing.com

Not tested

Comply

Not tested

Pass



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 7 of 14

the pictogram as shown in Figure 12b.

9.1.7 The manufacturer's recommended conditions of storage (at least the temperature and humidity) or equivalent pictogram, as shown in Figures 12c and 12d.

9.1.8 The packaging of those particle filtering half masks passing the dolomite clogging test shall be additionally marked with the letter "D". This letter shall follow the classification marking preceded by a single space.

9.2 Particle filtering half mask

Particle filtering half masks complying with this European Standard shall be clearly and durably marked with the following:

9.2.1 The name, trademark or other means of identification of the manufacturer or supplier.

9.2.2 Type-identifying marking.

9.2.3 The number and year of publication of this European Standard.

9.2.4 Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D.

9.2.5 If appropriate the letter D (dolomite) in accordance with clogging performance. This letter shall follow the classification marking preceded by a single space.

9.2.6 Sub-assemblies and components with considerable bearing on safety shall be marked so that they can be identified.

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 8 of 14

Annex A: Summarization of Test Data

Head Head Walk Sample Walk Talk Mean Condition Side/side up/down Subject No. (%) (%) (%) (%) (%) (%) 7.9 7.6 5.8 7.3 7.3 1 7.8 Lv A.R 2 7.3 Li 5.6 5.3 7.8 5.9 6.4 A.R 7.1 8.7 7.5 7.3 Zhong 3 6.5 6.8 A.R 7.3 7.4 7.7 7.5 Xu 4 8.5 6.7 A.R 7.2 6.2 Ma 5 5.5 6.4 6.3 5.5 A.R 9.9 6.2 Chen 6 3.5 4.2 4.6 8.8 T.C Chen 7 4.6 4.8 5.7 7.3 6.1 5.7 T.C Zhuo 8 5.4 5.4 4.9 7.4 6.4 5.9 T.C Chen 9 4.7 8.8 5.2 6.1 5.8 6.4 T.C Zhang 10 5.2 6.3 6.8 7.3 5.6 6.2 T.C

 Table 7.9.1-A: Inward Leakage Test Data

Test specification: EN 149:2001+A1:2009 Clause 8.5

Table 7.9.1-B: Facial dimension

Subject	Face Length	Face Width	Face Depth	Mouth Width
C S Lv S S	113	139	104	53
o di jo	120	135	112	55
Zhong	108	135	106	56
C Xu C	120	150	120	70 0
Ма	130	170	130	80
Chen	110	160	90	40
Chen	115	145	110	50
Zhuo	103	146	100	50
Chen	(110)	145	<u> </u>	40
Zhang	144	141	101	54

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 9 of 14

Table 7.9.2: Penetration of filter material

Test specification: EN 149:2001+A1:2009 Clause 8.11

Aerosol	Condition	Sample No.	Penetration (%)	Assessment
to to to	to so so so so	~ 11 ~	0.1	N N N
	As received	12	0.1	
8 8 8 8 8		13	0.1	8 8 8
x0 x0 x0	0 10 10 10 10	0 14 0	0.1	20 20 X
Sodium chloride test	Simulated wearing treatment	15	0.1	8.8.8
1° 1° 1°		16	0.1	8 6 6
		17	0.1	
\$~ \$~ \$~ \$	Mechanical strength + Temperature conditioned	18	0.1	\$ \$ \$ \$
X0 X0 X0		19	0.1 _0 _0	FFP2
Q Q Q Q	$\langle \langle \langle \langle \langle \rangle \rangle \rangle \rangle \langle \langle \langle \langle \rangle \rangle \rangle \rangle \langle \langle \langle \langle \rangle \rangle \rangle \langle \langle \rangle \langle \langle \rangle \langle \langle \rangle \rangle \langle \langle $	20	1.4	Pass
1° 1° 1° 1	As received	21	0.5	8 8 8
		22	0.4	
8 8 8 8 1		23	0.5	8 8 6 8
Paraffin oil test	Simulated wearing treatment	24	1.5	20 20 X
<` <` <` <		25	0.9	5 5 5
1º 1º 1º	to to to to to	26	1.3	8 8 8
	Mechanical strength + Temperature conditioned	27	1.0	
5 5 5 5 V		28	2.5	8 8 8

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020 Page 10 of 14

Table 7.11: Flammability

Test specification: EN 149:2001+A1:2009 Clause 8.6

Condition	Sample No.	Result	Assessment
A A A A A A A A A	29	No burn	6 20 20 20 20 20
As received	30	O No burn	e de de de de
Tellinea Constantia e Cal	31	No burn	– Pass
Temperature conditioned	32	No burn	

Table 7.12: Carbon dioxide content of the inhalation air

Test specification: EN 149:2001+A1:2009 Clause 8.7

Condition	Sample No.	Re	sult (%)	Assessment
10 10 10	33	0.312	10 10 10 A	10 10 10
As received	34	0.0214	Mean value:0.027	Pass
	35	0.0273		

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 11 of 14

8 8	Flow Ra	ite 🥎	Ŕ		36			2		37			Q.		38		
10 10	Inhalation 30		5	çe ,	0.50	20	20	5	5	0.49	0	20	20	20	0.50	5 6	9
As received	malation	95 I/min			1.63	× -0	Č.	×.		1.64		с СС-	N. CI	X	1.66	×.	0
2 2 A	Exhalation	160	A	в	С	D	Ē	Α	В	С	D	Е	A	В	с	D	E
2º 20		l/min	2.9	2.9	2.8	2.9	2.9	2.9	2.8	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
	Flow Ra	ite			39					40			20		41		
Simulated	\$ \$	30 I/min	0.52		8	Ś	0.51		Ś	Q) -	Q.	0.52	Q				
wearing treatment	Inhalation	95 I/min	~~ .7	(° <	1.59	20	20	5	6	1.60	<0 <	2 ⁰	20	20	1.60	с б	0
treatment	Futerlation	160	Α	СВ	С	D	E	A	В	С	D	E	Α	В	С	D	GЕ
5, 5,	Exhalation	l/min	2.9	2.9	2.9	2.9	2.9	2.9	2.8	2.8	2.8	2.8	3.0	3.0	2.9	3.0	2.9
30 50	Flow Ra	ite	2	0	42	20	2º	43			20	44					
20 20	20 X	30 I/min	5, 6	G	0.43	20	20	~	5 2	0.44	0	20	20	20	0.43	5 x	Ö
Temperature conditioned	Inhalation	95 I/min	×.	2	1.40	<u>қ</u>	8	1.42			2	1.45					
à à	Exhalation	160	A	В	С	D	Ē	Α	В	C	D	E	A	В	С	D	E
x x	Exhalation	l/min	2.4	2.4	2.4	2.4	2.4	2.5	2.5	2.6	2.5	2.5	2.4	2.5	2.5	2.5	2.5
S	Flow Ra	ite			45	-0-	- C	1		46		-0-	200		47		0
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	8 8	30 I/min	2	~ <	0.47	Q.	2°	Q.	Q	0.45	Co K	5	Q.	8	0.45	Ŷ	
Flow conditioned	Inhalation	95 I/min	مبر مر	¢ ,	1.60	20	20	- 55	1 5	1.61	¢ ,	30	20	20	1.56	5	Q.
	Fulletier	160	Α	В	С	D	E	Α	В	С	D	ε	Α	в	С	D	ъE
8 8	Exhalation	l/min	2.5	2.5	2.5	2.5	2.4	2.4	2.5	2.6	2.6	2.6	2.5	2.5	2.5	2.5	2.6

Table 7.16: Breathing resistance (mbar)

A: Facing directly ahead

B: Facing vertically upwards

C: facing vertically downwards

D: Lying on the left side

E: Lying on the right side

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 12 of 14

Test	Uncertainty
Total inward leakage	3.8%
Penetration of filter material(NaCl)	3.5%
Penetration of filter material(Paraffin oil)	4.2%
Carbon dioxide content of the inhalation air	4.5%
Breathing resistance(30L/min)	5.2%
Breathing resistance(95L/min)	5.4%
Breathing resistance(160)L/min)	6.0%

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission




Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 13 of 14

Photo(s) of Sample:

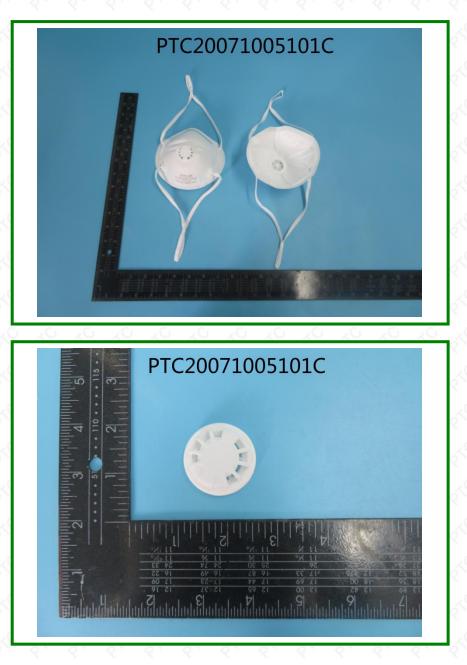

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission




Report No.: PTC20071005101C-EN01

Issue Date: Jul.28, 2020

Page 14 of 14



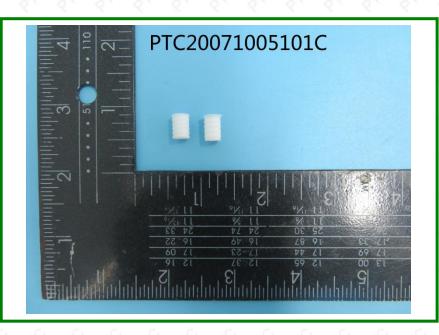

End of Report

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission